



GREEN POWER

LEAD

FREE

FROM THE MARKET LEADER IN LEAD-FREE AMMUNITION



LEAD-FREE COMPETENCE

Whether for hunting or sport shooting - we offer the best alternatives in lead-free ammunition for the most demanding and extreme applications. Tested many times, absolutely reliable and highly precise.



RWS EVOLUTION GREEN



RWS HIT



RWS HIGH VELOCITY GREEN



RWS HIGH VELOCITY
FRAGMENTATION GREEN



RWS HYPERDOME



RWS HYPERMAX



NORMA ECO SPEED-22



NORMA ECO POWER-22
FRAGMENTATION



NORMA ECOSTRIKE



NORMA EVOSTRIKE



GECO STAR




GECO ZERO

NOTE: AVAILABILITY MAY VARY DEPENDING ON COUNTRY




EVOLUTION GREEN

OUTSTANDING SHOCK EFFECT - LEAD-FREE

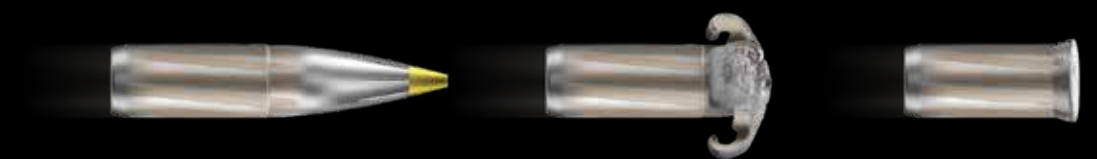

RWS EVOLUTION GREEN is a partially fragmenting, lead-free bullet featuring a series of interdependent constructive details. It achieves its convincing performance with dual cores made from food-safe tin and featuring a special pre-fragmentation of the


frontal core. Working together with the Speed Tip point, this creates outstanding shocking power even at long ranges. This bullet is particularly versatile and universal, but is ideal for light to medium game.

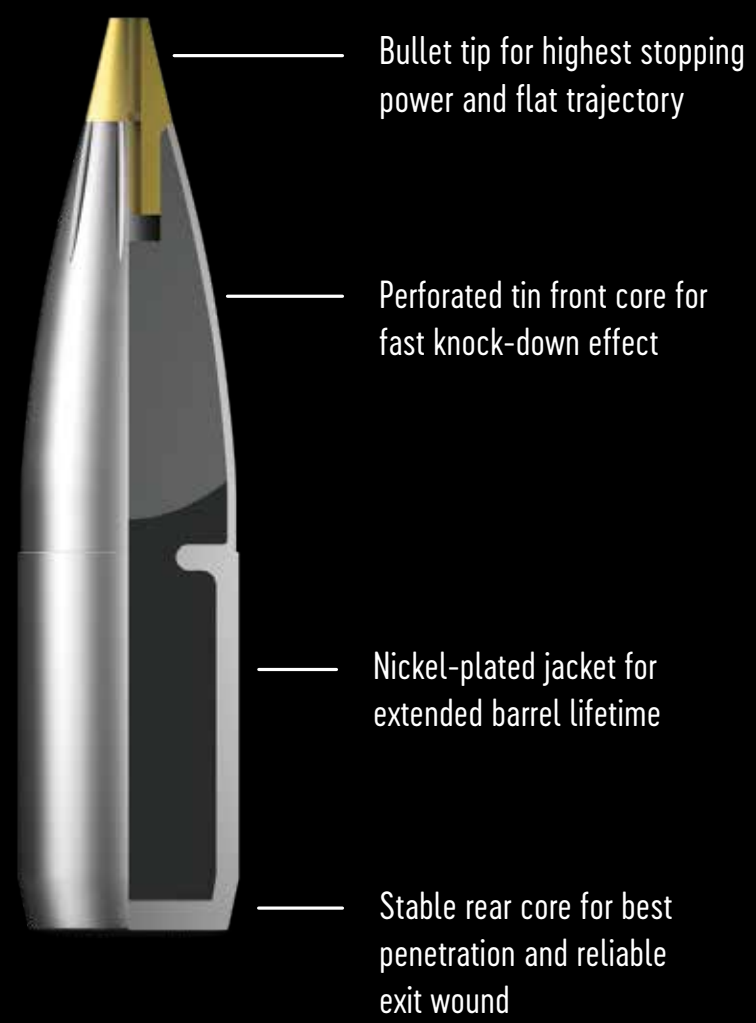

Simulated wound cavity in ballistic gelatine



Cal. .308 Win. at 100 m

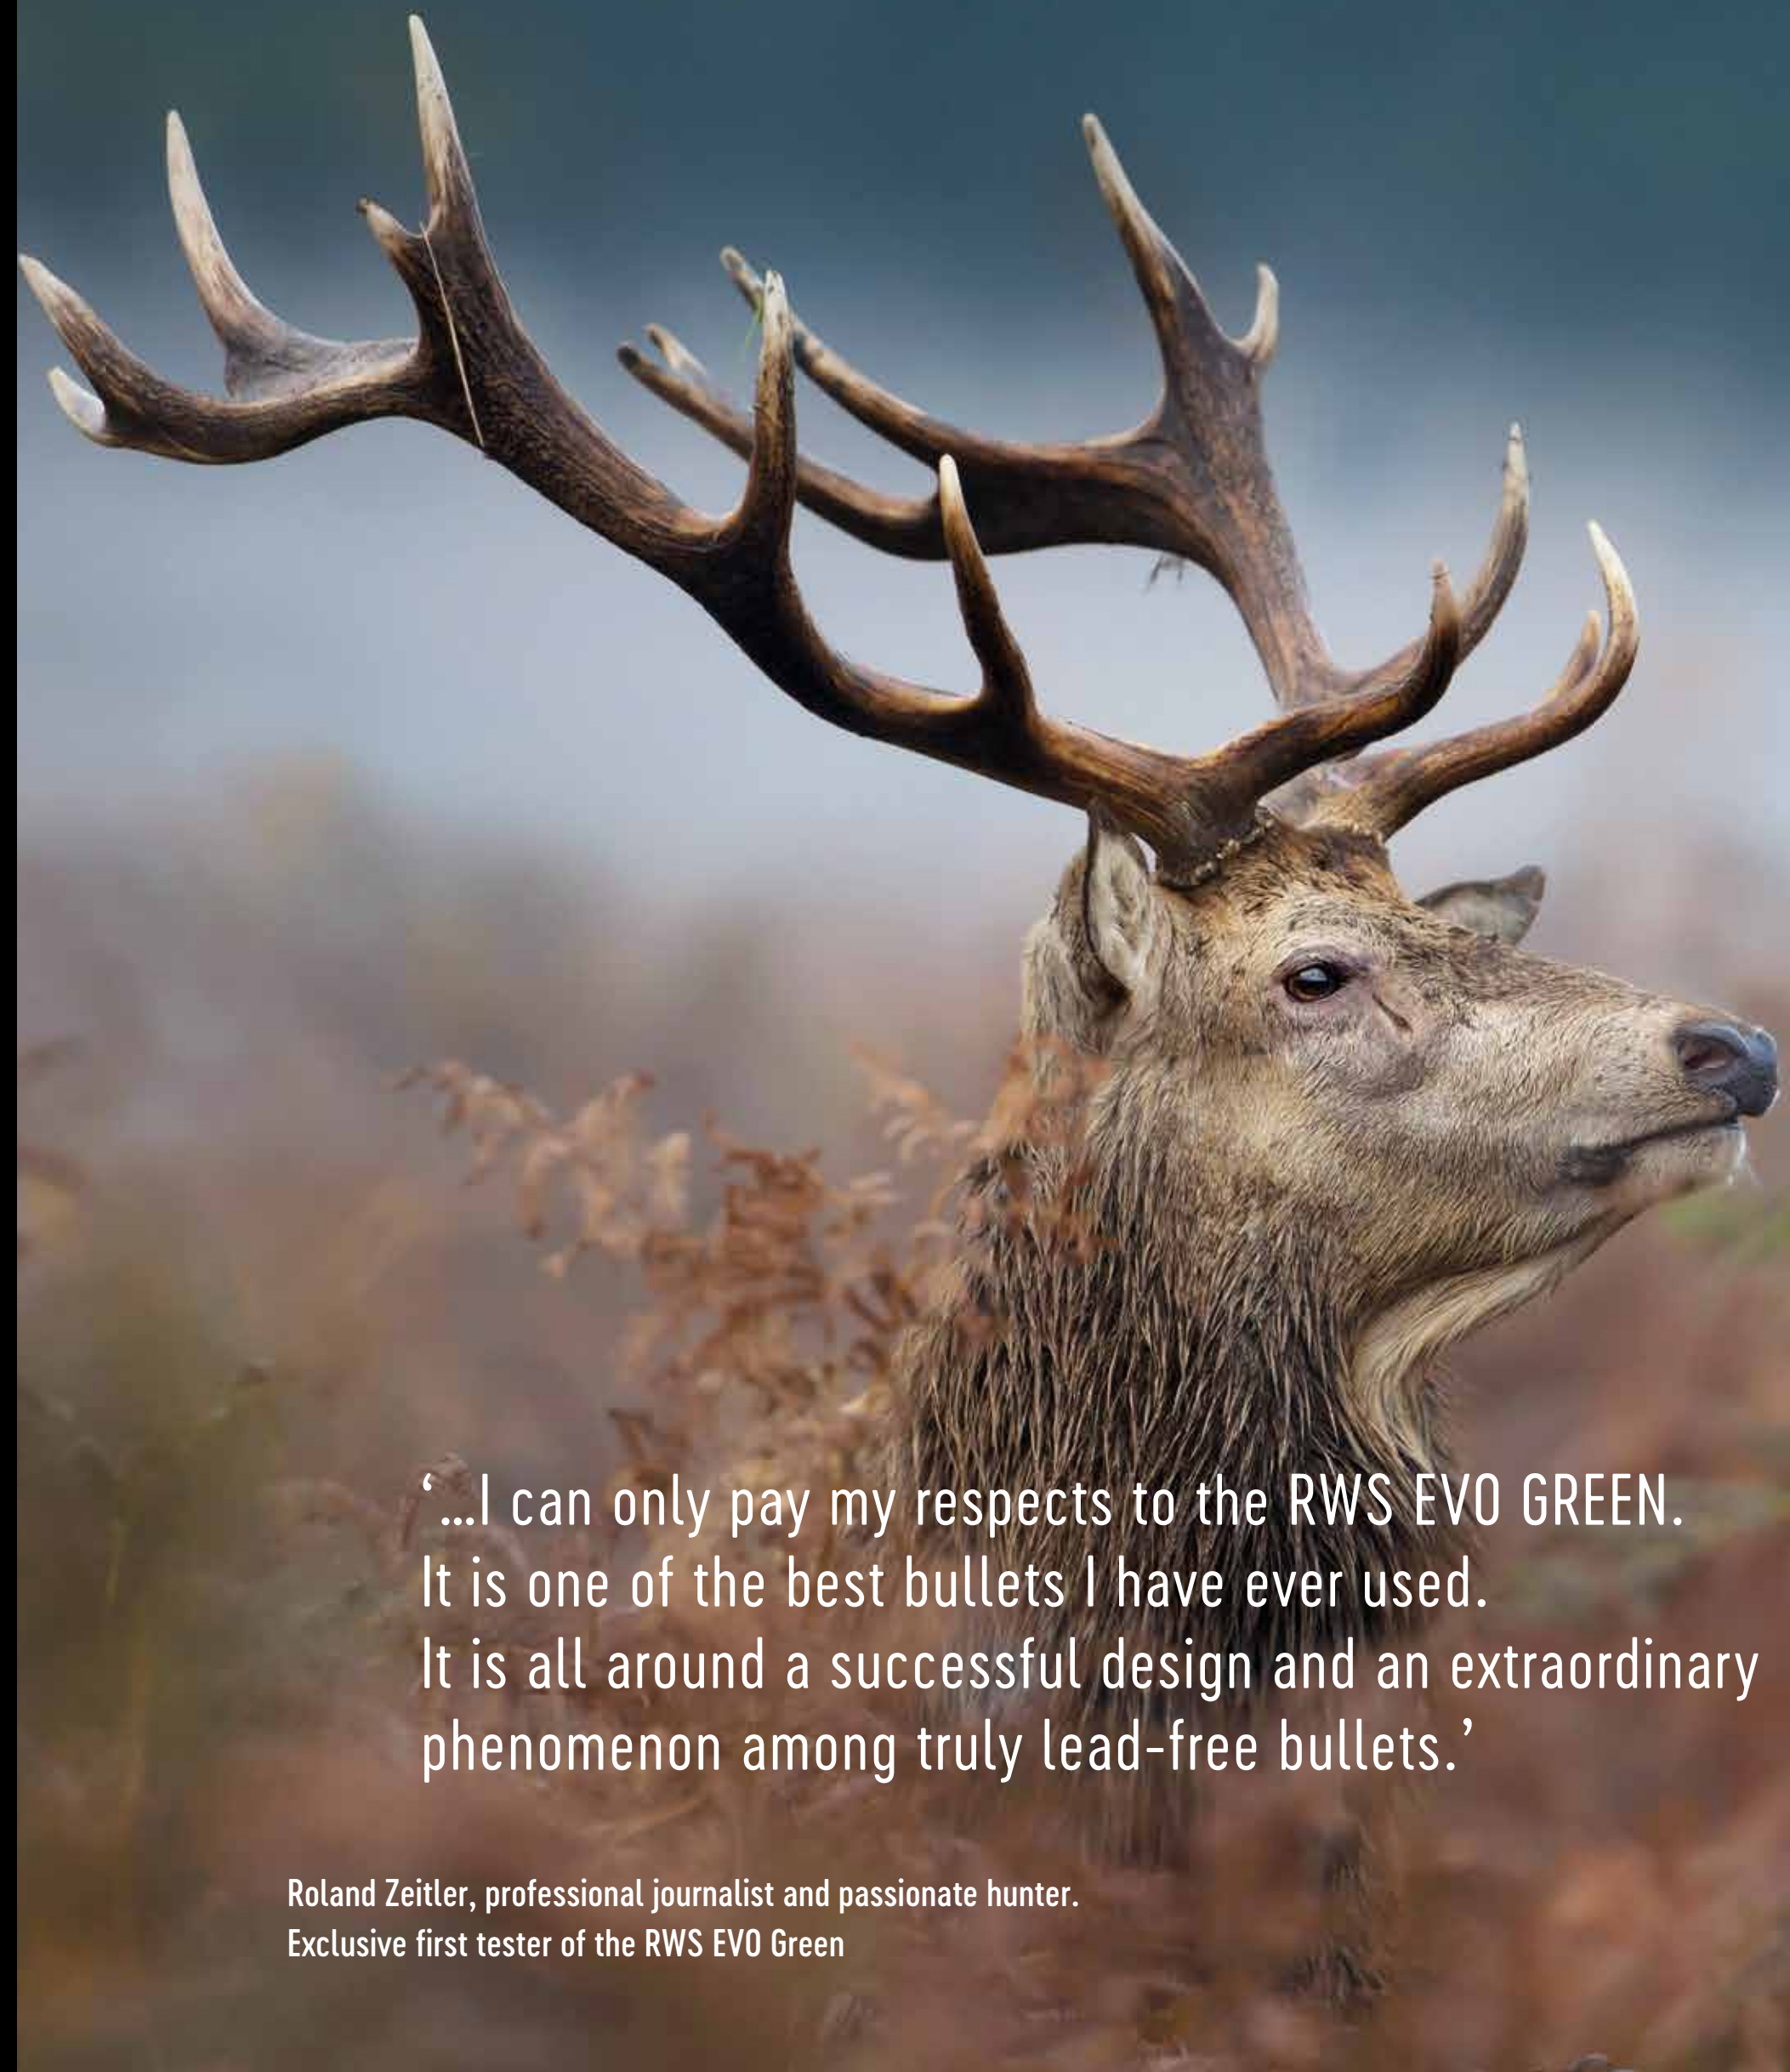

‘...I can only pay my respects to the RWS EVO GREEN. It is one of the best bullets I have ever used. It is all around a successful design and an extraordinary phenomenon among truly lead-free bullets.’

Roland Zeitler, professional journalist and passionate hunter.
Exclusive first tester of the RWS EVO Green



HIT - HIGH IMPACT TECHNOLOGY

CONVINCING PENETRATION – LEAD-FREE



RWS HIT is a lead-free expanding bullet with high weight retention due to its monolithic construction. The unique HIT Matrix with the RWS TC-Tip (Twin-Compression-Tip) and the RWS ACC (Active-Crater-Cavity) guarantees fast and reliable expansion with great stopping power, even at long ranges. The compact slug, which retains 99% of its original weight, assures deep penetration and an exit wound - even after striking bone! This makes RWS HIT the appropriate lead-free alternative for those favouring non-fragmenting bullets. This bullet is suitable for all common types of game, but is ideal for medium to heavy game.

SUPERIOR PENETRATION


Certain exit wound with reliable blood trail. The bullet expands to about twice its diameter and retains 99% of its original weight.




LESS DAMAGED MEAT

Unlike fragmenting bullets, the lead-free RWS HIT imparts its energy exclusively by a 100% fragment-free mushrooming in the game. The result: Good meat yield and no bullet fragments!

RWS HIT wound channel in ballistic soap [.30-06 at 100 metres]

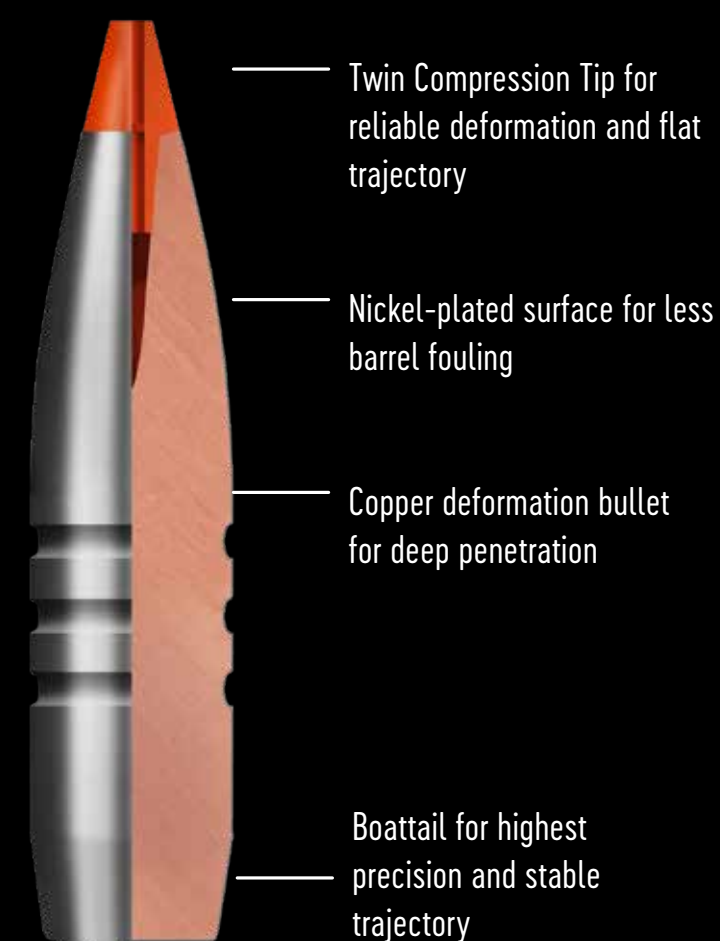

Simulated wound cavity in ballistic gelatine

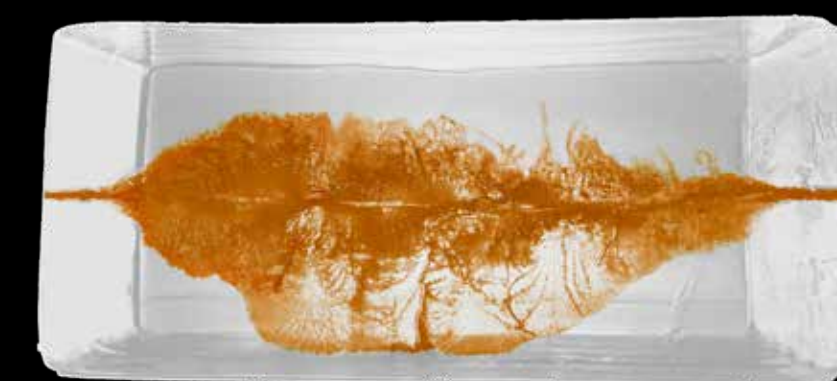

Cal. .308 Win. at 100 m

BALLISTIC DATA

BULLET Item No.	Weight g gr	Barrel length/mm BC-Value J	V ₀ E	0m	100m	200m	300m	RZR J	100m Trajectory (cm)	200m	300m	Ctg/box	
.22 Hornet													
HIT	2.6	600	V[m/s]	736	526	370	295	⊕	100m	⊕	-32.3	-136.4	20
NEW 241 98 37	40	0.123	E[J]	704	360	178	113	RZR	132	4.0	-24.4	-124.5	
.222 Rem.													
HIT	2.6	600	V[m/s]	1060	761	520	352	⊕	100m	⊕	-12.9	-65.0	20
NEW 242 09 76	40	0.108	E[J]	1461	753	352	161	RZR	170	4.0	-4.9	-52.9	
.223 Rem.													
HIT	2.6	600	V[m/s]	1104	801	566	380	⊕	100m	⊕	-10.9	-55.4	20
NEW 241 98 39	40	0.110	E[J]	1584	834	416	188	RZR	181	4.0	-2.9	-43.3	
5.6 x 50 R													
HIT	2.6	600	V[m/s]	1034	738	500	341	⊕	100m	⊕	-14.1	-70.5	20
NEW 241 98 38	40	0.107	E[J]	1390	708	325	151	RZR	166	4.0	-6.0	-58.4	
6.5 Creedmoor													
EVO GREEN	6.0	600	V[m/s]	998	893	799	708	⊕	100 m	⊕	-7.3	-30.1	20
241 16 82	93	0.317	E[J]	2988	2392	1915	1504	RZR	185 m	4.0	0.7	-18.1	
6.5x55 SE													
EVO Green	6.0	600	V[m/s]	990	883	788	694	⊕	100 m	⊕	-7.6	-31.2	20
240 14 04	93	0.309	E[J]	2940	2339	1863	1445	RZR	203 m	4.0	0.3	-19.2	
6.5 x 57													
EVO GREEN	6.0	600	V[m/s]	950	848	753	659	⊕	100 m	⊕	-8.7	-34.9	20
240 14 05	93	0.309	E[J]	2708	2157	1701	1303	RZR	194 m	4.0	-0.7	-22.8	
6.5 x 57 R													
EVO GREEN	6.0	600	V[m/s]	920	818	726	638	⊕	100 m	⊕	-9.7	-38.2	20
240 14 07	93	0.309	E[J]	2539	2007	1581	1221	RZR	187 m	4.0	-1.7	-26.1	
6.5 x 68													
EVO GREEN	6.0	650	V[m/s]	1110	996	897	795	⊕	100 m	⊕	-4.9	-22.0	20
231 88 67	93	0.309	E[J]	3696	2976	2414	1896	RZR	235 m	4.0	3.1	-10.0	
.270 Win.													
EVO GREEN	6.2	600	V[m/s]	1080	959	849	748	⊕	100 m	⊕	-5.7	-25.1	20
231 88 62	96	0.292	E[J]	3616	2851	2234	1734	RZR	223 m	4.0	2.3	-13.1	
HIT	8.4	600	V[m/s]	921	839	763	690	⊕	100 m	⊕	-9.0	-34.9	20
231 92 10	130	0.385	E[J]	3567	2960	2448	2002	RZR	192 m	4.0	-1.0	-22.8	
.270 WSM													
EVO GREEN	6.2	650	V[m/s]	1119	995	882	777	⊕	100 m	⊕	-5.0	-22.6	20
231 88 63	96	0.292	E[J]	3882	3069	2412	1872	RZR	233 m	4.0	3.0	-10.6	
HIT	8.4	650	V[m/s]	940	858	776	702	⊕	100 m	⊕	-8.4	-33.2	20
231 92 06	130	0.385	E[J]	3716	3096	2532	2072	RZR	196 m	4.0	-0.3	-21.1	
7 x 57 R													
EVO GREEN	8.2	600	V[m/s]	830	755	683	616	⊕	100 m	⊕	-12.3	-45.7	20
231 85 44	127	0.392	E[J]	2824	2337	1913	1556	RZR	171 m	4.0	-4.4	-33.8	
7 mm Rem. Mag.													
EVO GREEN	8.2	650	V[m/s]	1010	924	843	767	⊕	100 m	⊕	-6.5	-26.9	20
231 85 45	127	0.392	E[J]	4182	3500	2914	2412	RZR	214 m	4.0	1.5	-15.0	
HIT	9.1	650	V[m/s]	940	861	787	717	⊕	100 m	⊕	-8.3	-32.4	20
231 88 48	140	0.409	E[J]	4020	3373	2818	2339	RZR	198 m	4.0	-0.2	-20.3	
7 x 64													
EVO GREEN	8.2	600	V[m/s]	950	868	790	716	⊕	100 m	⊕	-8.1	-31.9	20
231 83 21	127	0.392	E[J]	3700	3089	2559	2102	RZR	199 m	4.0	-0.1	-19.9	
HIT	9.1	600	V[m/s]	900	824	752	683	⊕	100 m	⊕	-9.5	-36.4	20
231 88 46	140	0.409	E[J]	3673	3079	2565	2116	RZR	188 m	4.0	-1.5	-24.4	
7 x 65 R													
EVO GREEN	8.2	600	V[m/s]	910	830	754	683	⊕	100 m	⊕	-9.3	-35.9	20
231 83 22	127	0.392	E[J]	3395	2824	2331	1913	RZR	189 m	4.0	-1.3	-24.0	
HIT	9.1	600	V[m/s]	850	776	707	640	⊕	100 m	⊕	-11.3	-42.4	20
231 88 47	140	0.409	E[J]	3277	2731	2267	1858	RZR	176 m	4.0	-3.4	-30.5	
.308 Win.													
NEW 241 17 83	139	0.332	E[J]	3645	2923	2313	1820	RZR	184 m	4.0	-2.1	-27.5	
EVO GREEN	9.0	600	V[m/s]	885	789	702	618	⊕	100 m	⊕	-10.8	-41.7	20
240 86 44	139	0.318	E[J]	3525	2801	2218	1719	RZR	180 m	4.0	-2.8	-29.7	
HIT	9.7	500	V[m/s]	870	791	716	646	⊕	100 m	⊕	-10.7	-40.7	20
240 66 15	150	0.386	E[J]	3671	3035	2486	2024	RZR	180 m	4.0	-2.7	-28.7	
HIT	10.7	600	V[m/s]	820	750	683	620	⊕	100 m	⊕	-12.5	-46.1	20
231 88 45	165	0.420	E[J]	3597	3009	2496	2057	RZR	170 m	4.0	-4.5	-34.2	

Ammunition availability as per individual country regulations

BALLISTIC DATA

BULLET Item No.	Weight g gr	Barrel length/mm BC-Value J	V ₀ E	0m	100m	200m	300m	RZR J	100m Trajectory (cm)	200m	300m	Ctg/box	
.30-06													
NEW 241 17 85	139	0.338	E[J]	3493	2816	2243	1769	RZR	180 m	4.0	-2.8	-29.3	
EVO GREEN	9.0	600	V[m/s]	875	780	693	610	⊕	100 m	⊕	-11.2	-43.0	20
240 86 42	139	0.318	E[J]	3445	2738	2161	1674	RZR	175 m	4.0	-3.2	-30.9	
HIT	10.7	500	V[m/s]	840	769	701	636	⊕	100 m	⊕	-11.7	-43.4	20
240 84 72	165	0.420	E[J]	3775	3164	2629	2164	RZR	173 m	3.9	-3.9	-31.7	
HIT	10.7	600	V[m/s]	840	769	701	636	⊕	100 m	⊕	-11.7	-43.4	20
231 88 43	165	0.420	E[J]	3775	3164	2629	2164	RZR	175 m	4.0	-3.6	-31.3	
.30 R Blaser													
EVO GREEN	9.0	600	V[m/s]	933	834	745	658	⊕	100 m	⊕	-9.2	-36.1	20
240 86 46	139	0.319	E[J]	3917	3130	2498	1948	RZR	191 m	4.0	-1.2	-24.1	
.300 Win. Mag.													
EVO GREEN	9.0	650	V[m/s]	1014	911	819	729	⊕	100 m	⊕	-6.8	-28.4	20
240 86 43	139	0.326	E[J]	4627	3735	3018	2391	RZR	208 m	3.9	0.9	-16.8	
HIT	10.7	500	V[m/s]	950	873	800	731	⊕	100 m	⊕	-7.9	-31.2	20
240 84 74	165	0.420	E[J]	4828	4077	3424	2859	RZR	199 m	3.9	-0.1	-19.4	
HIT	10.7	650	V[m/s]	950	873	801	733	⊕	100 m	⊕	-7.9	-31.2	20
231 88 44	165	0.420	E[J]	4828	4077	3433	2874	RZR	201 m	4.0	0.1	-19.1	
8 x 57 JS													
EVO GREEN	9.0	600	V[m/s]	920	824	734	650	⊕	100 m	⊕	-9.5	-37.4	20
231 83 27	139	0.327	E[J]	3809	3055	2424	1901	RZR	188 m	4.0	-1.5	-25.3	
HIT	10.4	500	V[m/s]	835	748	670	596	⊕	100 m	⊕	-12.6	-47.2	20
240 84 75	160	0.338	E[J]	3615	2901	2328	1842	RZR	169 m	3.9	-4.8	-35.5	
HIT	10.4	600	V[m/s]	830	744	666	592	⊕	100 m	⊕	-12.8	-47.9	20
231 92 08	160	0.338	E[J]	3572	2870	2300	1817	RZR	170 m	4.0	-4.7	-35.7	
8 x 57 JRS													
EVO GREEN	9.0	600	V[m/s]	865	773	686	606	⊕	100 m	⊕	-11.5	-44.0	20
231 83 26	139	0.327	E[J]	3367	2689	2118	1653	RZR	176 m	4.0	-3.4	-31.9	
HIT	10.4	600	V[m/s]	805	719	636	560	⊕	100 m	⊕	-14.1	-52.7	20
231 92 07	160	0.338	E[J]	3360	2680	2097	1626	RZR	164 m	4.0	-6.0	-40.6	
8 x 68 S													
EVO GREEN	9.0	650	V[m/s]	1019	916	824	738	⊕	100 m	⊕	-6.7	-28.0	20
231 85 47	139	0.327	E[J]	4673	3776	3055	2451	RZR	213 m	4.0	1.3	-15.9	
HIT	10.4	650	V[m/s]	970	873	785	700	⊕	100 m	⊕	-7.9	-31.8	20
231 92 09	160	0.338	E[J]	4879	3952	3195	2541	RZR	201 m	4.0	0.1	-19.7	
9.3 x 62													
EVO GREEN	11.9	600	V[m/s]	900	801	708	623	⊕	100 m	⊕	-10.4	-40.5	20
231 83 28	184	0.312	E[J]	4820	3818	2983	2309	RZR	182 m	4.0	-2.4	-28.5	
HIT	16.2	500	V[m/s]	770	698	633	571	⊕	100 m	⊕	-15.2	-55.0	20
240 84 76	250	0.395	E[J]	4804	3948	3247	2642	RZR	159 m	3.9	-7.3	-43.1	
HIT	16.2	600	V[m/s]	765	693	628	566	⊕	100 m	⊕	-15.5	-55.9	20
231 94 68	250	0.395	E[J]	4742	3891	3195	2596	RZR	159 m	4.0	-7.4	-43.8	
9.3 x 64													
EVO GREEN	11.9	650	V[m/s]	970	866								



RWS RIMFIRE CARTRIDGES

FIELD LINE: DESIGNED FOR SUCCESSFUL HUNTING – LEAD-FREE



HIGH VELOCITY GREEN | HIGH VELOCITY GREEN FRAGMENTATION

100% LEAD-FREE For all those who prefer to – or must – refrain from using traditional lead-core hunting bullets, RWS offers two lead-free options in .22 long rifle: **HIGH VELOCITY GREEN** and **HIGH VELOCITY GREEN FRAGMENTATION**. Both items are 100% lead-free. This means that not only is the bullet made of copper-plated zinc, but the primer is lead-free as well. RWS **HIGH VELOCITY GREEN** and **HIGH VELOCITY GREEN FRAGMENTATION** are also great examples of the superior technology behind “Made in Germany”. RWS develops and produces all of its own components, such as cases, primers and bullets. This is the only way that all components of a cartridge can be exactly matched to one another, thereby guaranteeing RWS’ legendary product quality.



The partially fragmenting bullet of the **HIGH VELOCITY GREEN FRAGMENTATION** delivers outstanding shocking power. Thanks to its copper-plated zinc hollow-point bullet and a velocity that is up to 58% higher than that of a standard lead round nose bullet, an optimal depth of penetration as well as great energy deposit into the target are guaranteed.

Item No.	Calibre	Type	Bullet Type	Weight g	Barrel-Length mm	Velocity m/s			Energy Joule			sighting in distance				point of impact in cm with scope mounted 5cm above bore axis				
						V ₀	V ₅₀	V ₁₀₀	E ₀	E ₅₀	E ₁₀₀	50 m	75 m	100 m	25 m	50 m	75 m	100 m		
241 38 17	.22 LR	High Velocity Green	zinc, copper-plated	1.6	650	520	396	313	210	122	76	50 m	-1.0	⊕	-2.9	-10.9				
241 38 18	.22 LR	High Velocity Green Fragmentation	zinc, copper-plated	1.6	650	520	397	313	210	122	76	50 m	-1.0	⊕	-2.9	-10.9				

RWS AIRGUN PELLETS

THE LEAD-FREE ALTERNATIVES WITH MAXIMUM IMPACT



As a leading supplier of airgun ammunition, the name RWS guarantees excellent quality and technology worldwide. Decades of experience in the production of diablo pellets assure an impressive lead on the market. RWS airgun pellets are characterised by their particularly skillful material composition, the special surface finish and optimised weight. This guarantees outstanding precision.

RWS HYPERMAX

- The highlights at a glance:
- Between 25 - 30% faster than standard pellets of the same calibre
 - Conical point for excellent penetration
 - High-tech tin alloy
 - Ultra light weight
 - Brilliant High Speed finish
 - Very good accuracy

Applications:
Silhouette shooting, small pest control Suitable for air rifles and air pistols.

HYPERMAX
200
0.34 g / 5.2 gr
Kaliber 4.5 mm / Caliber .177
Tin



HYPERMAX
150
0.64 g / 9.9 gr
Kaliber 5.5 mm / Caliber .22
Tin



Item No.	Calibre mm	Pellet weight g	Pellet length mm	Single pack.	Sales pack.
231 81 61	4.5	0.34	7.10	200	2000
231 81 96	5.5	0.64	8.60	150	1500

RWS HYPERDOME

- The highlights at a glance:
- Very lightweight and therefore faster than standard pellets of the same calibre
 - Bulldog head for excellent penetration
 - High-tech tin alloy
 - Brilliant High Speed finish
 - Delivers very tight groups

Applications:
Silhouette shooting, small pest control Suitable for air rifles and air pistols.

HYPERDOME
200
0.36 g / 5.5 gr
Kaliber 4.5 mm / Caliber .177
Tin



HYPERDOME
150
0.71 g / 11.0 gr
Kaliber 5.5 mm / Caliber .22
Tin



Item No.	Calibre mm	Pellet weight g	Pellet length mm	Single pack.	Sales pack.
231 81 62	4.5	0.36	6.45	200	2000
231 81 63	5.5	0.71	7.80	150	1500

norma

DEDICATED SINCE 1902

ECOSPEED-22 HYPER VELOCITY



LEAD FREE

An unique lead-free option with unrivalled performance

New for this year is our lead-free ECO Speed-22, with a muzzle velocity exceeding all others on the market. The cartridge is 100% lead-free, including the primer, making it quite unique on the market. Why unleaded primers? Well, if you do a lot of semi-auto shooting, all those harmful lead particles get into the air you're inhaling and can harm your internal organs.

ECOPOWER-22 FRAGMENTATION



LEAD FREE

Fragmentation zinc bullet

The new Eco Power-22 is a 100% leadfree round with a fragmentation bullet mainly developed for hunters. The Eco Power-22 delivers an astonishing velocity, up to 58% higher than standard lead round nose cartridge and thanks to its fragmentation bullet its knock-down power has no rival. This round is engineered to deliver high energy and astonishing knock-down power upon impact. It features a 1.6g/24.7gr zinc copper-plated bullet designed for high penetration and has a screaming fast 520m/s-1706ft/s muzzle velocity.

Product	Weight g	Barrel Length mm	Velocity m/s			ENERGY Joule		
			V ₀	V ₅₀	V ₁₀₀	E ₀	E ₅₀	E ₁₀₀
ECO SPEED-22	1.6	650	520	396	313	210	122	76
ECO POWER-22	1.6	650	520	396	313	210	122	76

sighting in distance	point of impact in cm with scope mounted 5cm above bore axis			
	25 m	50 m	75 m	100 m
50 m	-1.0	⊕	-2.9	-10.9





ECOSTRIKE™



Scan for recipes

Lead free - When the meat is everything.

ECOSTRIKE™ offers the latest in non-lead technology. It gets great weight retention and is deadly accurate. This monolithic bullet is tough and penetrates well.

100% copper bullet with great expansion even at low velocities

- The best choice for minimum meat damage
- Nickel coating increases life span of barrels




LEAD FREE



Specs

	Weight, g/gr BC-Value	V E ³	Zero range in m					Height of trajectory above line of sight in meters for sight 40 mm above bore					
			0m	100m	200m	300m	50m	80m	100m	150m	200m	300m	
.223 Rem.	2.6 g/40 gr	V[m/s]	Ballistic data can be found at www.norma-ammunition.com										
	0.110	E[J]	as soon as the product is available.										
7 x 65 R	9.1 g/140 gr	V[m/s]	860	792	726	644	100	-3	4	⊕	-37	-116	-418
	0.443	E[J]	3367	2852	2404	2009	200	27	50	58	50	⊕	-244
7 x 64	9.1 g/140 gr	V[m/s]	910	839	772	707	100	-4	2	⊕	-30	-99	-363
	0.443	E[J]	3770	3204	2710	2277	200	27	49	58	44	⊕	-215
7 mm Rem. Mag.	9.1 g/140	V[m/s]	950	877	808	742	100	-6	1	⊕	-26	-87	-325
	0.443	E[J]	4108	3500	2969	2504	200	16	36	43	39	⊕	-194
.308 Win.	9.7 g/150 gr	V[m/s]	860	788	719	654	100	-2	4	⊕	-37	-118	-425
	0.420	E[J]	3589	3012	2511	2078	200	27	51	59	51	⊕	-249
.308 Win.	9.7 g/150 gr	V[m/s]	Ballistic data can be found at www.norma-ammunition.com										
	0.380	E[J]	as soon as the product is available.										
.308 Win.	10.7 g/165 gr	V[m/s]	790	722	657	596	100	1	6	⊕	-48	-148	-523
	0.431	E[J]	3339	2789	2309	1900	200	38	65	74	63	⊕	-301
.30-06	9.7 g/150 gr	V[m/s]	900	826	755	689	100	-4	3	⊕	-32	-103	-379
	0.42	E[J]	3930	3309	2769	2300	200	22	44	52	46	⊕	-224
.30-06	9.7 g/150 gr	V[m/s]	Ballistic data can be found at www.norma-ammunition.com										
	0.380	E[J]	as soon as the product is available.										
.30-06	10.7 g/165 gr	V[m/s]	860	788	720	656	100	-2	4	⊕	-37	-118	-424
	0.431	E[J]	3957	3322	2773	2302	200	27	51	59	51	⊕	-248
.300 WSM	9.7 g/150 gr	V[m/s]	990	911	836	765	100	-7	1	⊕	-23	-78	-296
	0.42	E[J]	4756	4024	3390	2839	200	13	32	39	36	⊕	-180
.300 WSM	10.7 g/165 gr	V[m/s]	940	864	792	724	100	-5	2	⊕	-28	-91	-339
	0.431	E[J]	4727	3994	3356	2804	200	18	38	46	41	⊕	-202
.300 Win. Mag.	9.7 g/150 gr	V[m/s]	1000	920	845	773	100	-7	1	⊕	-22	-76	-288
	0.42	E[J]	4852	4107	3462	2902	200	12	31	38	35	⊕	-175
.300 Win. Mag.	10.7 g/165 gr	V[m/s]	950	874	801	733	100	-5	2	⊕	-27	-88	-329
	0.431	E[J]	4828	4087	3433	2874	200	17	37	44	40	⊕	-197
8 x 57 JRS	10.4 g/160 gr	V[m/s]	820	752	686	624	100	-1	5	⊕	-43	-133	-475
	0.43	E[J]	3498	2938	2451	2029	200	33	58	67	57	⊕	-276
8 x 57 JS	10.4 g/160 gr	V[m/s]	850	780	713	650	100	-2	4	⊕	-38	-121	-435
	0.43	E[J]	3759	3165	2648	2200	200	28	52	60	52	⊕	-254
8 x 57 JS	10.4 g/160 gr	V[m/s]	Ballistic data can be found at www.norma-ammunition.com										
	0.400	E[J]	as soon as the product is available.										
.338 Win. Mag.	13.0 g/200 gr	V[m/s]	900	831	766	704	100	-4	3	⊕	-32	-102	-370
	0.464	E[J]	5267	4495	3817	3221	200	22	43	51	45	⊕	-218
9.3 x 62	14.9 g/230 gr	V[m/s]	805	736	670	607	100	1	6	⊕	-46	-142	-503
	0.420	E[J]	4830	4034	3344	2750	200	36	62	71	60	⊕	-290
9.3 x 74 R	14.9 g/230 gr	V[m/s]	780	712	647	586	100	2	6	⊕	-51	-154	-543
	0.420	E[J]	4535	3778	3123	2560	200	41	68	77	65	⊕	-312
.375 H&H Mag.	16.2 g/250 gr	V[m/s]	820	751	686	624	100	0	5	⊕	-43	-134	-475
	0.438	E[J]	5449	4576	3817	3159	200	33	58	67	57	⊕	-275

Ammunition availability as per individual country regulations




Scan to
learn more

Small impact on the environment. Big impact on the game.

Lead-free choice for small and medium game when instant stop is required. EVOSTRIKE™ is the newest member of the STRIKE™ family. It delivers a quick and aggressive expansion with good penetrative qualities for fast hunts and difficult shots.

EVOSTRIKE™ achieves its convincing performance with dual cores made from tin and featuring a special pre-fragmentation of the frontal core and a solid core at the back for enhanced penetration. This creates outstanding stopping power even at long range. EVOSTRIKE™ is the perfect choice for Small and Medium game hunting when lead-free is the active choice.

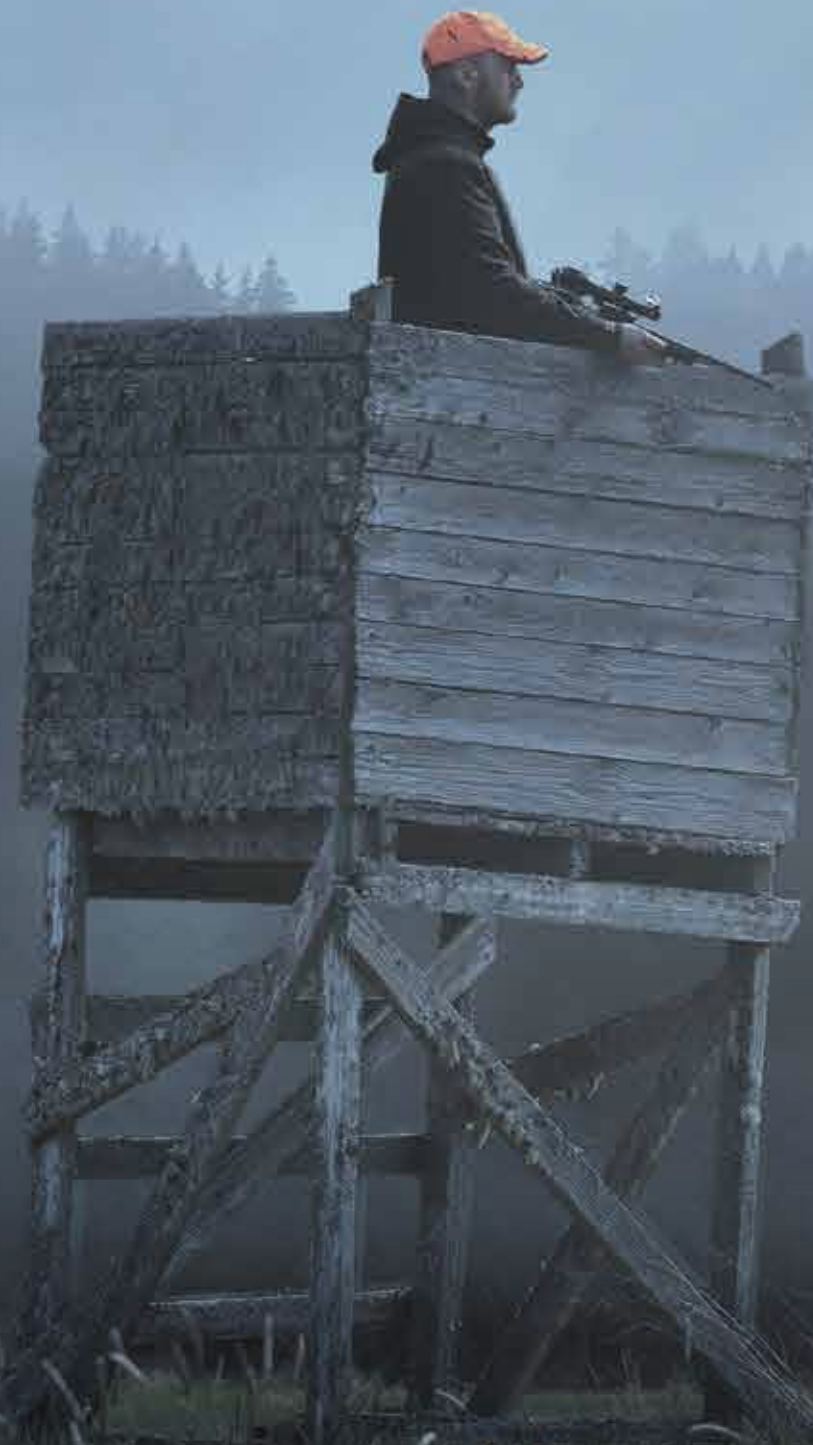

	Weight l g/gr BC-Value ¹⁾	V E ²⁾	Zero range in m					Height of trajectory above line of sight in at meters for sight 40 mm above bore					
			0m	100m	200m	300m	50m	80m	100m	150m	200m	300m	
6.5 x 55 SE	6.0 g / 93 gr	V[m/sec]	1000	891	790	696	100	-6	1	0	-25	-84	-325
	0.309	E[J]	3000	2382	1872	1453	200	15	32	42	38	0	-200
6.5 Creedmoor	6.0 g / 93 gr	V[m/sec]	1010	902	803	710	100	-7	1	⊕	-23	-81	-313
	0.309	E[J]	3060	2441	1934	1512	200	13	33	40	37	⊕	-193
.270 Win.	6.2 g / 96 gr	V[m/sec]	1080	957	845	742	100	-8	0	0	-18	-67	-272
	0.292	E[J]	3616	2839	2213	1707	200	7	27	34	32	0	-171
7 mm Rem. Mag	8.2 g / 127 gr	V[m/sec]	1010	922	840	763	100	-7	1	0	-22	-75	-289
	0.392	E[J]	4182	3485	2893	2387	200	12	31	38	34	0	-176
308 Win	9.0 g / 139 gr	V[m/sec]	885	787	696	611	100	-2	3	⊕	-37	-119	-440
	0.318	E[J]	3525	2787	2180	1680	200	27	48	59	52	⊕	-262
.30-06	9.0 g / 139 gr	V[m/sec]	900	807	720	639	100	-2	3	⊕	-36	-113	-417
	0.318	E[J]	4331	3483	2772	2180	200	26	49	57	49	⊕	-247
.300 Win. Mag.	9.0 g / 139 gr	V[m/sec]	1025	917	816	723	100	-7	0	⊕	-22	-77	-301
	0.318	E[J]	4728	3784	2996	2352	200	12	31	38	35	⊕	-186
8 x 57 JS	9.0 g / 139 gr	V[m/sec]	920	822	731	646	100	-4	2	⊕	-32	-105	-394
	0.327	E[J]	3809	3041	2405	1878	200	22	42	53	47	⊕	-236
9.3 x 62	11.9 g / 184 gr	V[m/sec]	900	799	705	618	100	-3	3	⊕	-35	-114	-425
	0.312	E[J]	4820	3798	2957	2272	200	25	46	57	50	⊕	-254

Ammunition availability as per individual country regulations



**Lead-free knock-down bullet for
small and medium game**

Reliable penetration with stable rear core
Effective also at long ranges



LEAD FREE



STAR

THE DYNAMIC HUNTING BULLET


“After successful bullet tests in ballistic soap, 25 professional hunters were supplied with the **GECO STAR**. After a successful hunting season, over 550 shooting reports were analyzed and evaluated. The results on boar as well as roe and red deer show that **GECO STAR** functions reliably as a dynamic lead-free expanding bullet and represents a good alternative to lead-core bullets.”

Nils Waltring,
Productmanager Hunting & Sports




GECO STAR is the newest development of the brand. This lead-free expanding bullet stands out with maximum penetration and high weight retention. Due to its hollow point, STAR deforms reliably at nearly all common hunting ranges.

It also possesses a high level of intrinsic accuracy, which is ensured by the integral Performance Grooves built into the bullet shank. **GECO STAR** is the optimal bullet for all those who hunt lead-free and wish to waste as little meat as possible.

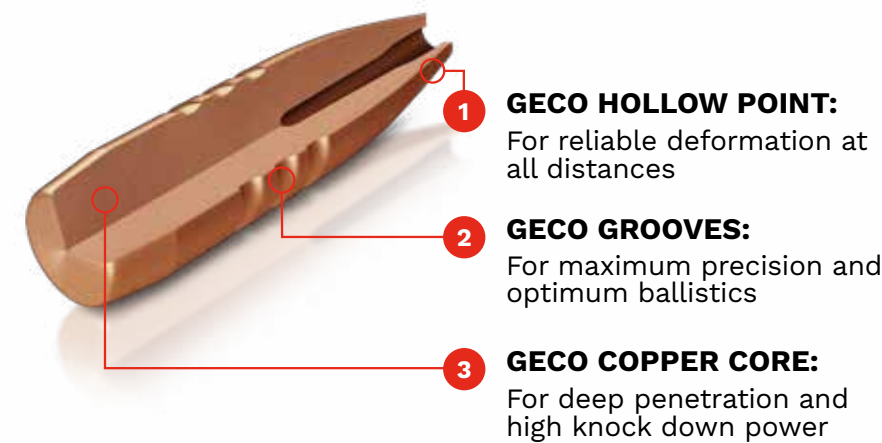

PERFORMANCE

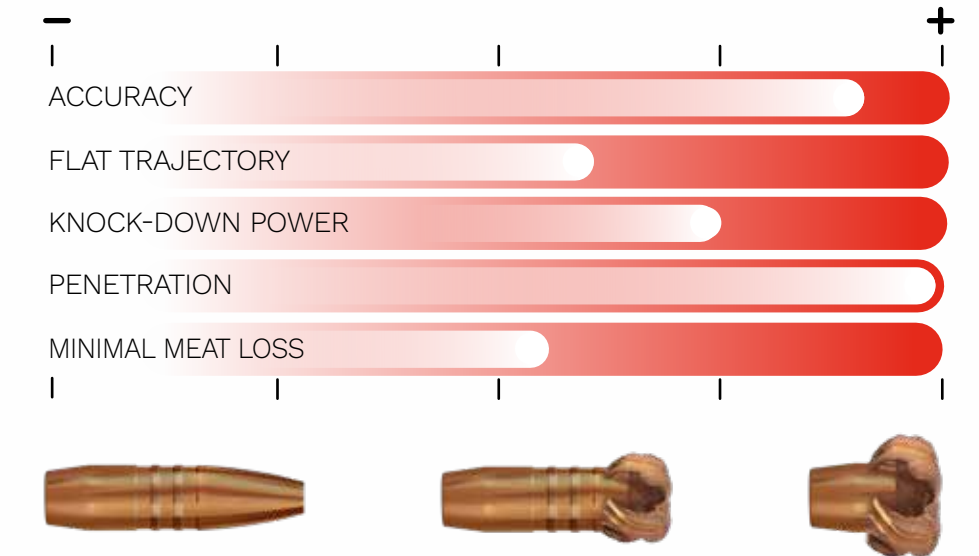

Available in calibres .308 Win., .30-06, .300 Win. Mag. and

NEW 2021: Extension of the product line in calibre 8x57 JS and 8x57 JRS

BALLISTIC TABLE

Bullet Item No.	Gramm Grain	Barrel length mm BC-Value ¹⁾	V ²⁾ E	0 m	100 m	200 m	300 m	RZR* ³⁾	100 m	200 m	300 m	Ctg/box
.308 Win.												
STAR	10.7	600	V[m/sec]	783	709	638	573	⊕ 100 m	⊕	-14.6	-53.5	20
241 38 33	165	0.388	E[J]	3280	2689	2178	1757	GEE 162 m	+4.0	-6.5	-41.4	
.30-06												
STAR	10.7	600	V[m/sec]	824	750	680	614	⊕ 100 m	⊕	-12.5	-46.4	20
241 38 35	165	0.397	E[J]	3633	3009	2474	2017	GEE 171 m	+4.0	-4.5	-34.3	
.300 Win. Mag.												
STAR	10.7	650	V[m/sec]	921	839	766	693	⊕ 100 m	⊕	-9.0	-34.7	20
241 38 36	165	0.387	E[J]	4538	3766	3139	2569	GEE 193 m	+4.0	-0.9	-22.6	
8 x 57 JS												
STAR	10.4	600	V[m/sec]	816	703	596	503	⊕ 100 m	⊕	-15.1	-58.3	20
242 47 29	160	0.255	E[J]	3462	2570	1847	1316	GEE 160 m	+4.0	-7.2	-46.4	
8 x 57 JRS												
STAR	10.4	600	V[m/sec]	836	719	612	515	⊕ 100 m	⊕	-14.2	-54.9	20
242 47 30	164	0.251	E[J]	3634	2688	1948	1379	GEE 164 m	+4.0	-6.2	-43.0	

Ammunition availability as per individual country regulations

1) BC-Value = Ballistic coefficient

2) V = Velocity, E = Energy

3) RZR = Recommended Zero Range



ZERO


THE CLEVER HUNTING BULLET

The lead-free fragmentation bullet GECO ZERO distinguishes itself with premium accuracy and outstanding stopping power - and is completely lead-free!




This highly innovative jacketed bullet has two tin cores. Assisted by the hollow-point design, the pre-fragmented front core disintegrates instantly upon contact with the game and releases a large portion of its energy to quickly bring it down. Together with the jacket, the rear core remains a stable slug to penetrate and provide a reliable exit wound.

This makes **GECO ZERO** an excellent choice for all types of game.

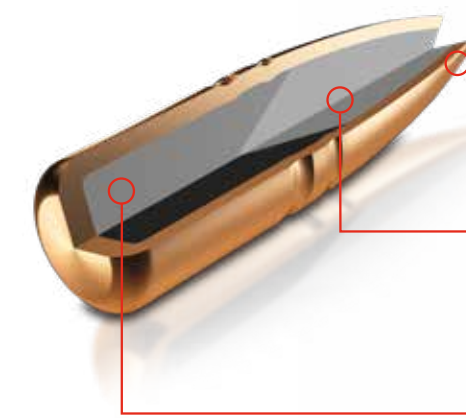

- 1 GECO PERFORMANCE POINT:** for precision and a reliable fragmentation
- 2 PRE-FRAGMENTED TIN FRONT CORE:** for a secure fragmentation and high impact shock
- 3 TAIL CONSTRICTION:** for a mass-stable residual body and reliable exit wound

PERFORMANCE

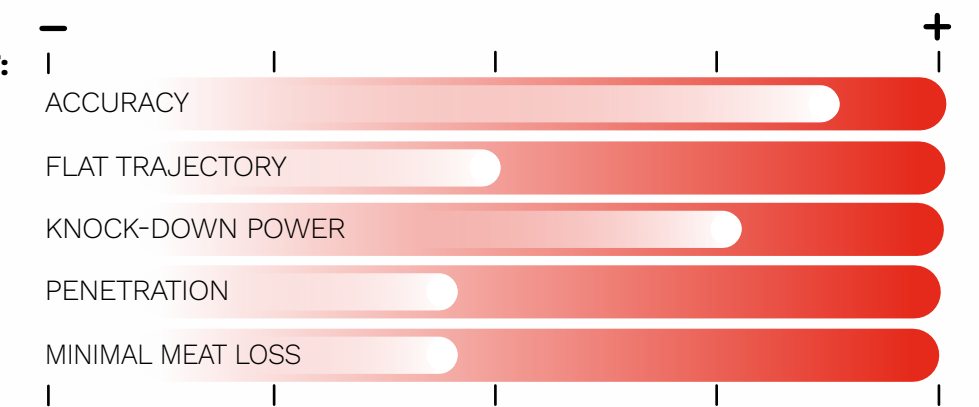

Available in 12 different calibres.

BALLISTIC TABLE

Bullet Item No.	Gramm Grain	Barrel length mm BC-Value ¹⁾	V ²⁾ E	0 m	100 m	200 m	300 m	RZR* ³⁾	100 m	200 m	300 m	Ctg/box
7 x 57												
ZERO	8.2	600	V[m/sec]	870	760	659	566	⊕ 100 m	⊕	-12.1	-47.1	20
231 88 17	127	0.274	E[J]	3103	2368	1781	1313	GEE 173 m	+4.0	-4.1	-35.0	
7 x 57 R												
ZERO	8.2	600	V[m/sec]	820	714	616	527	⊕ 100 m	⊕	-14.4	-55.0	20
231 88 18	127	0.274	E[J]	2757	2090	1556	1139	GEE 163 m	+4.0	-6.4	-42.9	
7 mm Rem. Mag.												
ZERO	8.2	650	V[m/sec]	980	861	752	651	⊕ 100 m	⊕	-8.3	-34.2	20
231 88 68	127	0.274	E[J]	3938	3039	2319	1738	GEE 197 m	+4.0	-0.3	-22.1	
7 x 64												
ZERO	8.2	600	V[m/sec]	940	824	718	620	⊕ 100 m	⊕	-9.6	-38.3	20
231 88 19	127	0.274	E[J]	3623	2784	2114	1576	GEE 188 m	+4.0	-1.5	-26.2	
7 x 65 R												
ZERO	8.2	600	V[m/sec]	890	778	676	581	⊕ 100 m	⊕	-11.3	-44.4	20
231 88 20	127	0.274	E[J]	3248	2482	1874	1384	GEE 177 m	+4.0	-3.3	-32.3	
.308 Win.												
ZERO	8.8	600	V[m/sec]	870	739	621	515	⊕ 100 m	⊕	-13.2	-52.2	20
231 88 23	136	0.229	E[J]	3330	2403	1697	1167	GEE 168 m	+4.0	-5.2	-40.3	
.30-06												
ZERO	8.8	600	V[m/sec]	920	785	662	551	⊕ 100 m	⊕	-11.1	-45.0	20
231 88 21	136	0.229	E[J]	3724	2711	1928	1336	GEE 178 m	+4.0	-3.1	-33.0	
.300 Win. Mag.												
ZERO	8.8	650	V[m/sec]	1010	866	736	618	⊕ 100 m	⊕	-8.2	-34.8	20
231 88 22	136	0.229	E[J]	4488	3300	2383	1680	GEE 197 m	+4.0	-0.2	-22.8	
8 x 57 JS												
ZERO	9.0	600	V[m/sec]	900	760	636	530	⊕ 100 m	⊕	-12.2	-49.0	20
231 89 47	139	0.225	E[J]	3645	2599	1820	1264	GEE 173 m	+4.0	-4.2	-36.9	
8 x 57 JRS												
ZERO	9.0	600	V[m/sec]	850	712	594	494	⊕ 100 m	⊕	-14.6	-57.3	20
231 89 48	139	0.225	E[J]	3251	2281	1588	1098	GEE 163 m	+4.0	-6.6	-45.4	
9.3 x 62												
ZERO	11.9	600	V[m/sec]	870	746	632	530	⊕ 100 m	⊕	-12.8	-50.6	20
231 89 50	184	0.241	E[J]	4504	3311	2377	1671	GEE 170 m	+4.0	-4.8	-38.5	
9.3 x 74 R												
ZERO	11.9	600	V[m/sec]	825	705	595	497	⊕ 100 m	⊕	-15.0	-58.1	20
231 89 51	184	0.241	E[J]	4050	2957	2106	1470	GEE 161 m	+4.0	-7.0	-46.1	

Ammunition availability as per individual country regulations 1) BC-Value = Ballistic coefficient 2) V = Velocity, E = Energy 3) RZR = Recommended Zero Range



RWS-AMMUNITION.COM

norma

NORMA-AMMUNITION.COM



GECO-AMMUNITION.COM



RUAG AMMOTEC UK LTD
UPTON CROSS, LISKEARD, CORNWALL, UK
WWW.RUAG.CO.UK

RUAG AMMOTEC GMBH • KRONACHER STRASSE 63 • 90765 FÜRTH • GERMANY
RWS, Norma, GECO and Rottweil are registered trademarks of RUAG Ammotec, a RUAG Group Company.

